
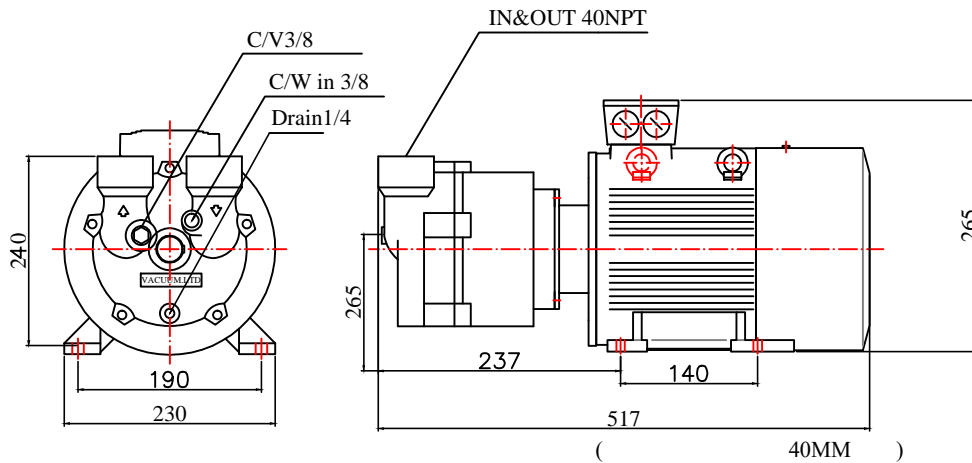


SPECIFICATIONS

Design	1450 Lit./min(50Hz)
Displacement	1880 Lit./min(60Hz)
Speed	2800 r.p.m. (50Hz)
	3600 r.p.m. (60Hz)
Normal usage vacuum pressure	Under 100Torr
Attainable vacuum pressure	Max 60 Torr
Suction port diameter	NPT 40A (2) (Option:B.S.P.T)
Motor	Motor () 3-Phase 220/380V 60Hz 3.7kW 2P
Water Capacity	15°C 10 L/MIN
Weight	50 Kg ()
Painting	Color- VL951 (Company's standard)
Allowable ambient temp.	-10 - 40C

- 1 Excluding motor and some other parts.
- B3B5 MOTOR IEC FANGE

Curve referred to dry air at 20°C (68°F) 배기량 SUCTION CAPACITY

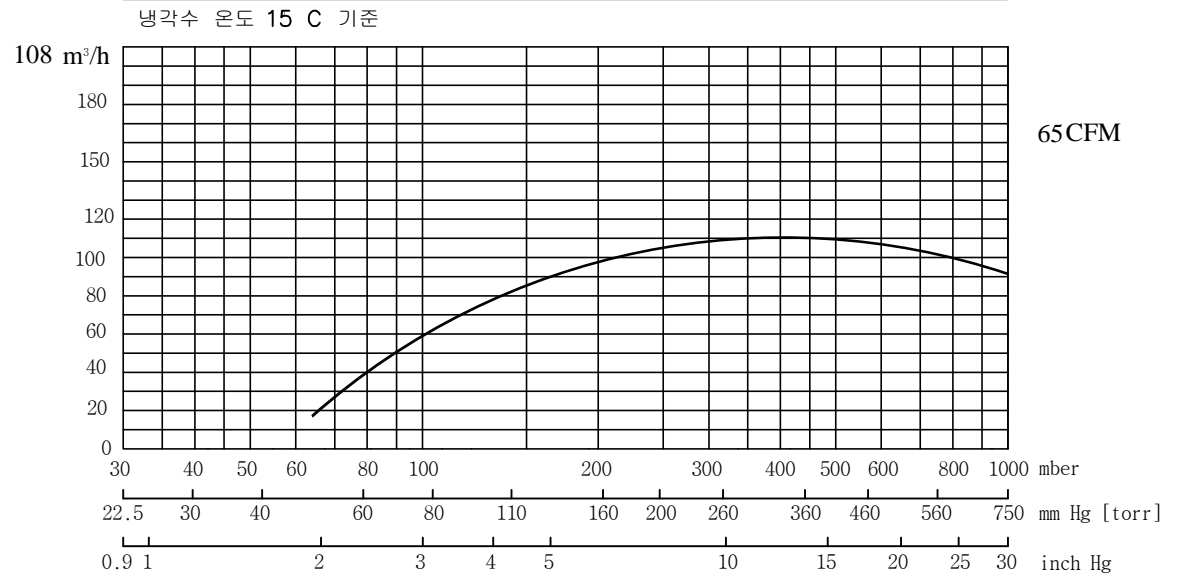

ACCESSORIES(Option)

- Vacuum Manual Valve
- Vacuum gauge
- Vacuum Check Valve
- Separator Tank

CONSUMABLE LIST

(Vacuum.ENG GENUINE PARTS)

Designation	Specification	Quantity/set
M/C SEAL	BELLOWS TYPE 33	1
Bearing	F#5307 R#6308ZZ Heat - resisting grease	1
BASE PLET	Option	1
Cavitation Valve	Option	1

DWG DATE	SCALE		TITLE
2020.00.05	N/S		WATER RING V/P
DWG BY	DES BY	CHD BY	APPROVE
			CLIENT
			LOCATION
			DWG NO
			JDRP-5M2

-BASE는OPTION임 모타는SIMENS 재질주문자에의함