


SPECIFICATIONS


Design	8500 Lit./min(50Hz)
Displacement	10283 Lit./min(60Hz)
Speed	1400 r.p.m. (50Hz) 1750 r.p.m. (60Hz)
Normal usage vacuum pressure	Under 40 Torr & 720MMHG
Attainable vacuum pressure	Max 22.5Torr & Max 33mber
Suction port diameter	KS 80A (2) in&out
Motor	Horizontal Motor Standard 3-Phase 380V 60Hz 18.5kW 4P
Water Capacity	15 °C 기준 56.6L/MIN
Weight	350g
Painting	Company's standard
Allowable ambient temp.	-10~40 C

-1 Excluding motor and some other parts.

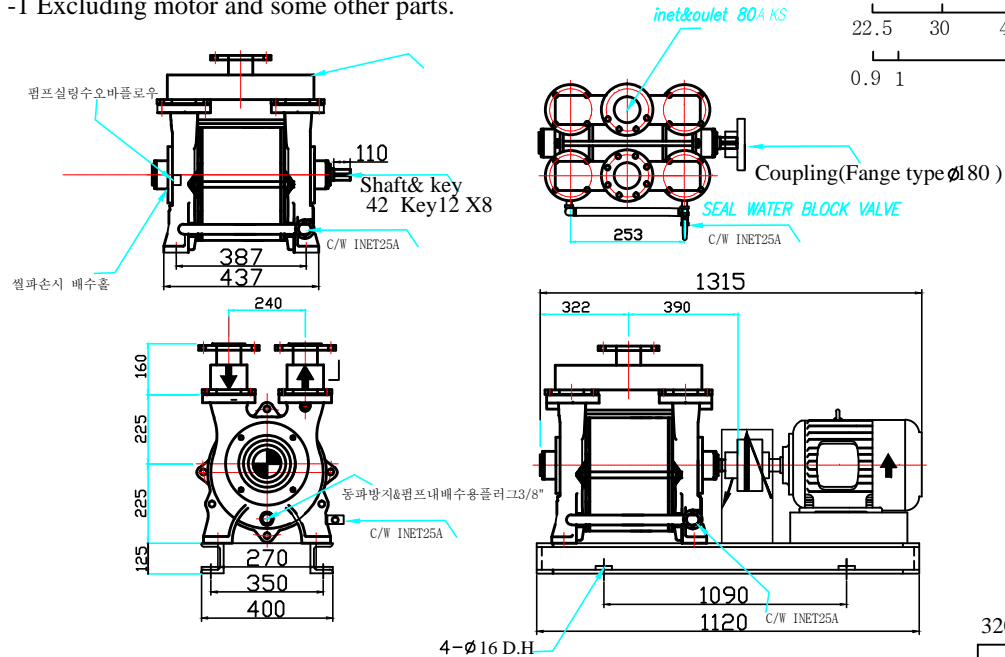

Curve referred to dry air at 20°C (68°F) 배기량 SUCTION CAPACITY

냉각수 온도 15 °C 기준

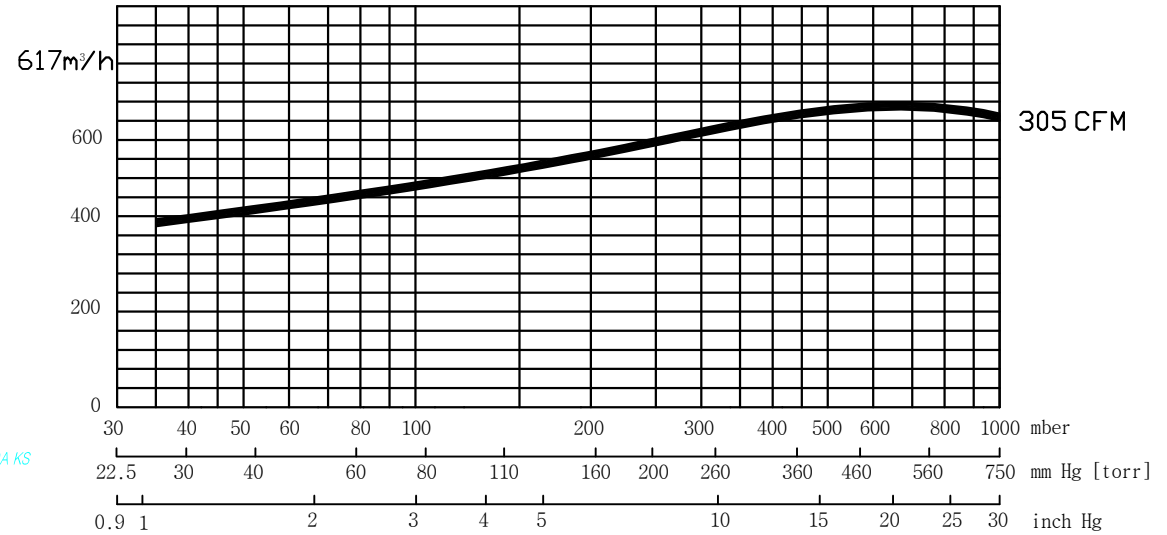

ACCESSORIES (Option)

- Vacuum Manual Valve
- Vacuum gauge
- Vacuum Check Valve
- Separator Tank
- Gas Ejector 8torr

CONSUMABLE LIST

(Vacuum.ENG GENUINE PARTS)

Designation	Specification	Quantity/set
M/C SEAL	Ø 60	2
Bearing	6310ZZ (Special) Heat - resisting grease	2
Amper	30A 27A 380V 38.5A	
Motor Sepc	180M Shaft 48Key12x5	1
Pump Body	180 kg	1

DWG DATE	SCALE	N/S	TITLE	WATER RING V/P
2016.04.03				
DWGBY	DESBNY	CHDBY	APPROVE	CLIENT
				LOCATION
진공엔지니어링				DWG NO
				JHLP1-1000

- 품질 개선을 위해서 예고없이 변경 될수 있음.
- Not binding dimension that can change according to motor make

