





SPECIFICATIONS

Design	8000 Lit./min(50Hz)
Displacement	10000 Lit./min(60Hz)
Speed	1400 r.p.m. (50Hz) 1750 r.p.m. (60Hz)
Normal usage vacuum pressure	Under Torr
Attainable vacuum pressure	Max 50Torr
Suction port diameter	JIS 100A (2) (Option:B.S.P.T)
Motor	Horizontal Motor Standard 3-Phase 220/380V 60Hz 22kW 4P
Water Capacity	15 ℓ 기준 45L/MIN
Weight	Kg
Painting	Color- VI.951 (Company's standard)
Allowable ambient temp.	-10~40℃

-1 Excluding motor and some other parts.

Curve referred to dry air at 20℃ (68℉) 배 기 량 SUCTION CAPACITY

배기수 온도 15℃ 기준

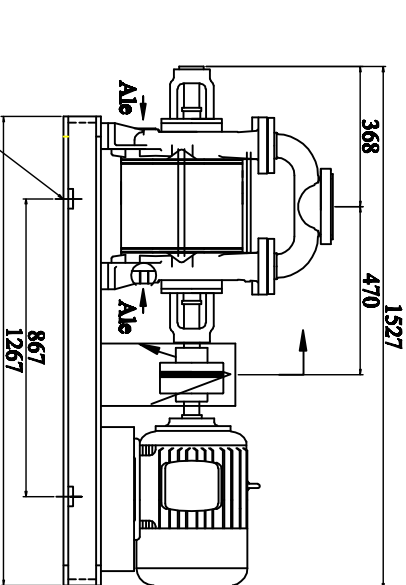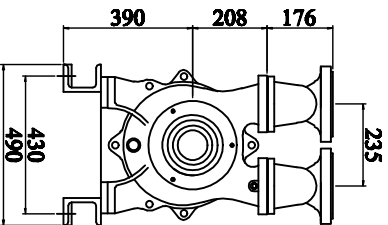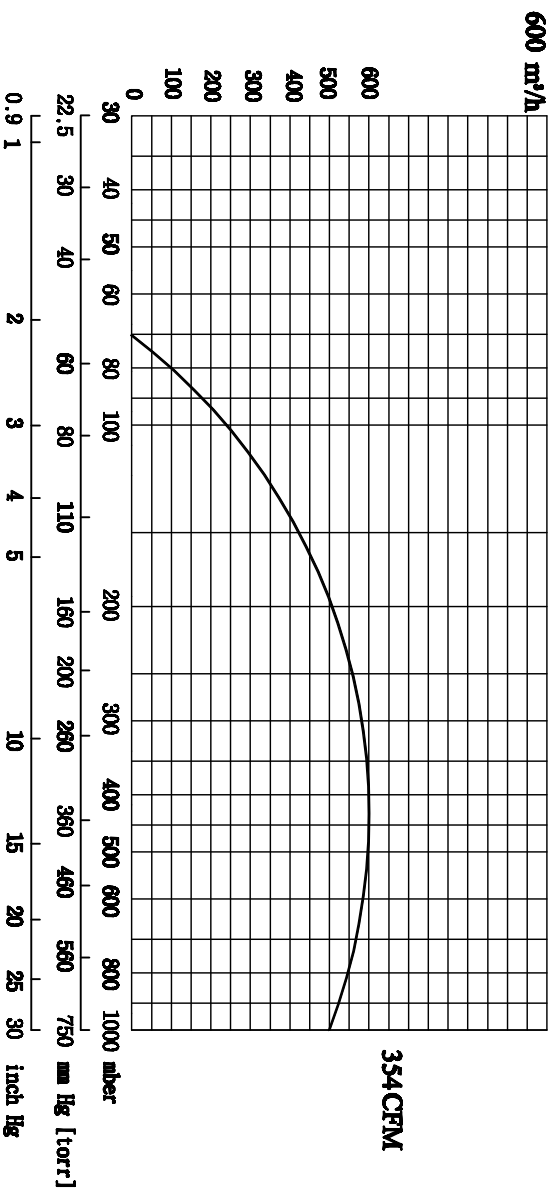

ACCESSORIES(OPTION)

- Vacuum Manual Valve
- Vacuum gauge
- Vacuum Check Valve
- Separator Tank

CONSUMABLE LIST

(VACUUM RING GENUINE PARTS)

Designation	Specification	Quantity/set
M/C Seal	φ 60	2
Bearing	6308 ZZ (Special Heat - resisting grease)	2
Half Coupling	φ 150	1
Shaft key	φ 38 10X8	1

DWG DATE	SCALE	N/S	TITLE
2000.00.00			WATER RING V/P
DWG BY	DESIGN BY	CHD BY / APPROVE	CLIENT
			LOCATION

진공엔지니어링

DWG NO JLRP1-100

- 품질 개선을 위해서 예고없이 변경 될수 있음.
- Not binding dimension that can be changed to motor make